

QSFP-40G-LX4

40GBase QSFP+
CWDM4
2km Reach

+45 (0)32 72 66 76



info@nexgen.eu



www.nexgen.eu



Features

- Compliant with IEEE Std 802.3ba, 40G Ethernet IR4
- Compliant with QSFP+MSA
- Management interface specifications per SFF-8436
- 4 CWDM Lane Mux/Demux design
- 4 channels CWDM DFB
- 4 channels PIN photo detector
- Up to 41.25Gb/s aggregated bitrate
- Up to 2km on SMF without FEC
- Class 1 laser safety certified
- Power dissipation <3.5W (0~70°C)
- RoHS Compliant



Applications

- 40GBASE-IR4 Ethernet
- Data Center Interconnect

Part number	Product description
QSFP-40G-LX4	40GBase MMF/SMF QSFP+ CWDM4 150m/2km 0°C to 70°C LC Duplex DDM


PIN Description

Pin		Function/Description	Notes
1	GND	Transmitter Ground (Common with Receiver Ground)	1
2	Tx2-	Transmitter Inverted Data Input	
3	Tx2+	Transmitter Non-Inverted Data output	
4	GND	Transmitter Ground (Common with Receiver Ground)	1
5	Tx4-	Transmitter Inverted Data Input	
6	Tx4+	Transmitter Non-Inverted Data output	
7	GND	Transmitter Ground (Common with Receiver Ground)	1
8	ModSelL	Module Select	2
9	ResetL	Module Reset	2
10	VccRx	3.3V Power Supply Receiver	
11	SCL	2-Wire serial Interface Clock	2
12	SDA	2-Wire serial Interface Data	2
13	GND	Transmitter Ground (Common with Receiver Ground)	1
14	Rx3+	Receiver Non-Inverted Data Output	
15	Rx3-	Receiver Inverted Data Output	
16	GND	Transmitter Ground (Common with Receiver Ground)	1
17	Rx1+	Receiver Non-Inverted Data Output	
18	Rx1-	Receiver Inverted Data Output	
19	GND	Transmitter Ground (Common with Receiver Ground)	1
20	GND	Transmitter Ground (Common with Receiver Ground)	1
21	Rx2-	Receiver Inverted Data Output	
22	Rx2+	Receiver Non-Inverted Data Output	
23	GND	Transmitter Ground (Common with Receiver Ground)	1
24	Rx4-	Receiver Inverted Data Output	1
25	Rx4+	Receiver Non-Inverted Data Output	
26	GND	Transmitter Ground (Common with Receiver Ground)	1
27	ModPrsL	Module Present	
28	IntL	Interrupt	2
29	VccTx	3.3V power supply transmitter	
30	Vcc1	3.3V power supply	
31	LPMODE	Low Power Mode	2
32	GND	Transmitter Ground (Common with Receiver Ground)	1
33	Tx3+	Transmitter Non-Inverted Data Input	
34	Tx3-	Transmitter Inverted Data Output	
35	GND	Transmitter Ground (Common with Receiver Ground)	1
36	Tx1+	Transmitter Non-Inverted Data Input	
37	Tx1-	Transmitter Inverted Data Output	
38	GND	Transmitter Ground (Common with Receiver Ground)	1

Notes:

1. The module signal grounds are isolated from the module case.
2. This is an open collector/drain output that on the host board requires a 4.7K Ω to 10K Ω pull-up resistor to VccHost.

Pin Assignment and Description

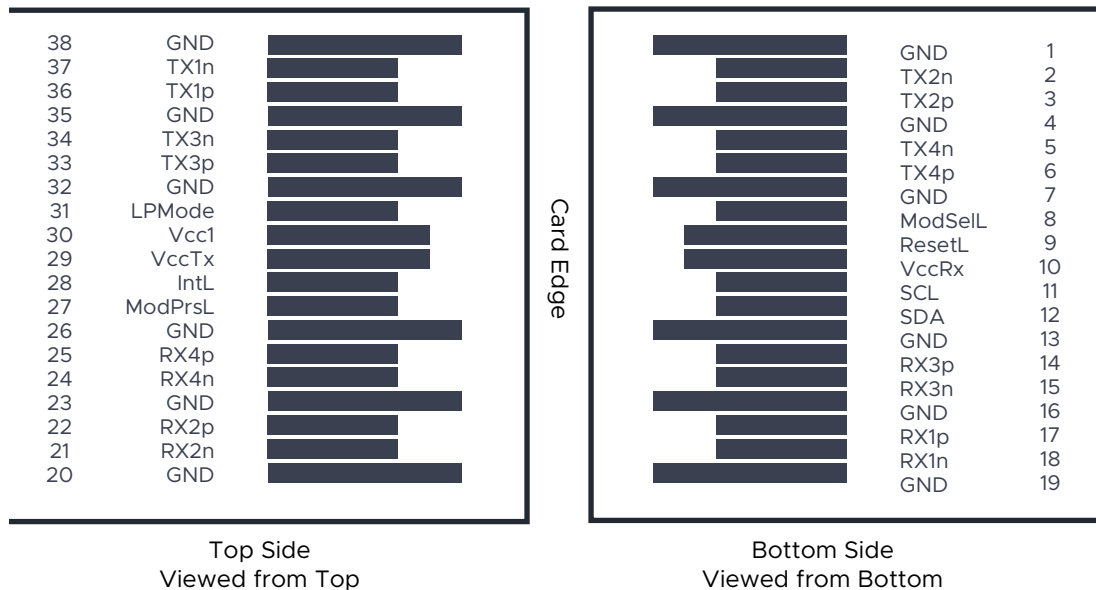

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Unit	Notes
Maximum Supply Voltage	-0.3	-	3.6	V	-
Storage Temperature	-40	-	+85	°C	-
Relative Humidity	5	-	95	%	1

Notes:

1. Non-condensing.

Recommend Operation Conditions

Parameter	Min	Typ	Max	Unit	Notes
Power Supply Voltage	3.13	3.3	3.47	V	-
Power Supply Current (com.)	-	-	1000	mA	-
Case Operating Temperature (com.)	0	-	+70	°C	-

Electrical Characteristics

Parameter	Min	Typ	Max	Unit	Notes
Transmitter					
Input differential impedance	-	100	-	Ω	1
Differential data input swing	180	-	900	mV	-
Receiver					
Output Differential Impedance	-	100	-	Ω	1
Differential Data Output Swing	300	-	850	mV	2
Data Output Rise Time	28	-	-	ps	-
Data Output Fall Time	28	-	-	ps	-

Notes:

1. AC coupled
2. into 100 Ω differential termination


Optical Characteristics

Parameter	Min	Typ	Max	Unit	Notes
Transmitter					
Optical Center Wavelength λ_0	1264.5	1271	1277.5	nm	-
Optical Center Wavelength λ_1	1284.5	1291	1297.5	nm	-
Optical Center Wavelength λ_2	1304.5	1311	1317.5	nm	-
Optical Center Wavelength λ_3	1324.5	1331	1337.5	nm	-
Average Output Power per lane (MMF)	-5	-	3.5	dBm	1
Average Output Power per lane (SMF)	-7	-	2.3	dBm	2
Extinction Ratio	3.5	-	-	dB	3
Spectral Width (-20dB)	-	-	1.0	nm	-
Side Mode Suppression Ration	30	-	-	dB	-
Data Rate per lane	-	10.3125	-	Gb/s	-
Receiver					
Optical Center Wavelength	1260	-	1340	nm	-
Receiver Sensitivity on MMF per lane (OMA)	-	-	-10.5	dBm	3
Receiver Sensitivity on SMF per lane (OMA)	-	-	-11.5	dBm	3
Damage Treshold	4.5	-	-	dBm	3
LOS Assert	-30	-	-	dBm	-
LOS De-Assert	-	-	-12	dBm	-
LOS Hysteresis	0.5	-	-	dB	-

Notes:

1. The optical power is launched into SMF.
2. The optical power is launched into MMF.
3. Measured with PRBS $2^{31}-1$ @ 10.3125Gb/s, BER 10^{-12}

Mechanical specifications

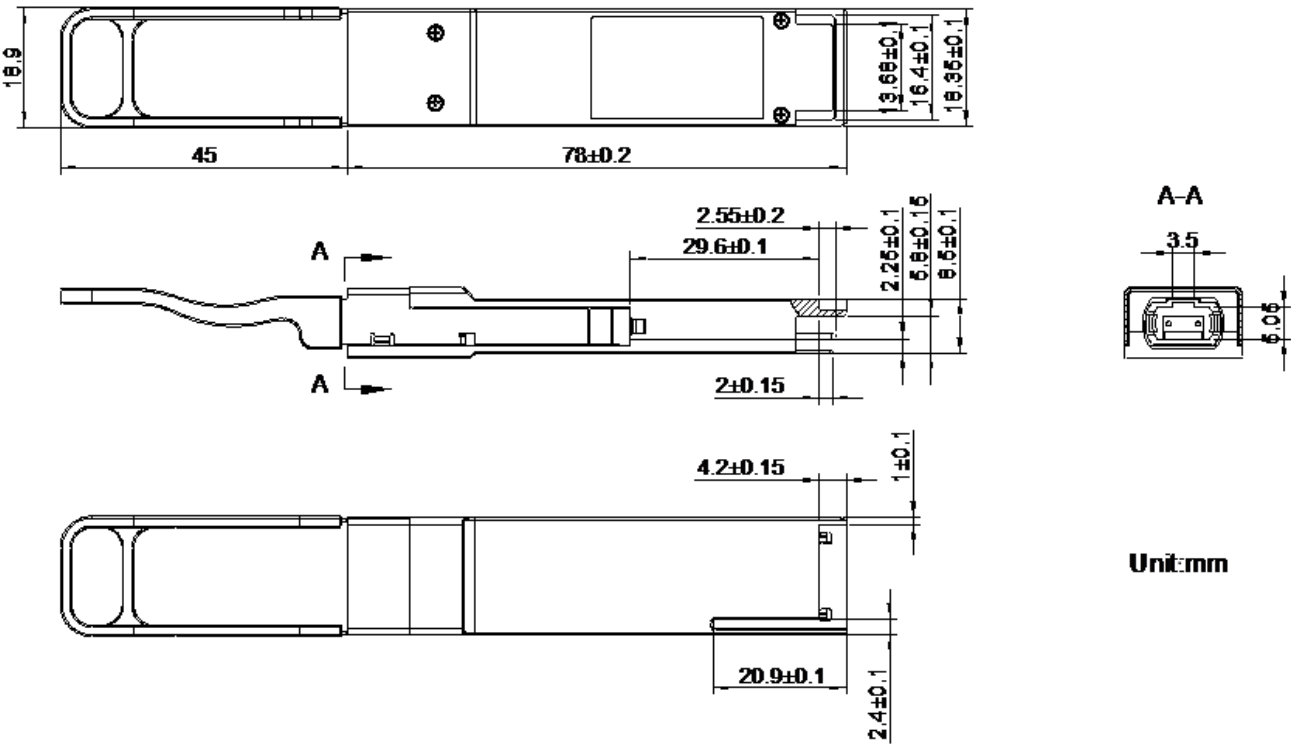

Revision history

Revision	Date	Author	Description
V1.0	16-03-2020	JGN	Initial Document

Note : Nexgen A/S reserves the right to change this document without notice.