

QSFP-40G-PSM4-L2

40GBase QSFP+
1310nm
2km Reach

+45 (0)32 72 66 76



info@nexgen.eu




www.nexgen.eu



Features

- Hot-pluggable QSFP+
- Supports up to 11.2Gb/s per channel
- DDM function compliant with SFF-8436
- 4 Channels PIN Receiver
- 4x 11.2Gb/s electrical interface
- MPO-12 optical connector
- 40GE link distances 2km over SMF
- Operating case temperature range 0 to 70°C
- Single 3.3V power supply
- RoHS-6 compliant

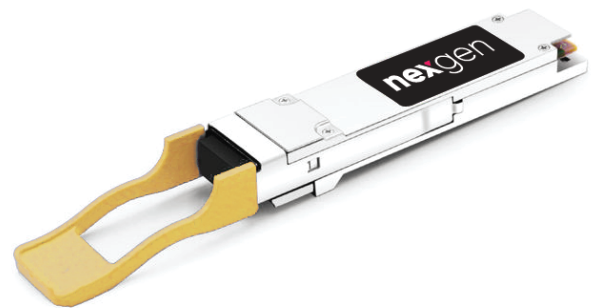

Applications

- 40GBASE-IR4 Ethernet
- Telecom / Data Center

Part number	Product description
QSFP-40G-PSM4-L2	40GBase SMF QSFP+ 1310nm 2km 0°C to 70°C MTP/MPO-12 DDM


PIN Description

Pin		Function/Description	Notes
1	GND	Transmitter Ground (Common with Receiver Ground)	1
2	Tx2-	Transmitter Inverted Data Input	
3	Tx2+	Transmitter Non-Inverted Data output	
4	GND	Transmitter Ground (Common with Receiver Ground)	1
5	Tx4-	Transmitter Inverted Data Input	
6	Tx4+	Transmitter Non-Inverted Data output	
7	GND	Transmitter Ground (Common with Receiver Ground)	1
8	ModSelL	Module Select	2
9	ResetL	Module Reset	2
10	VccRx	3.3V Power Supply Receiver	
11	SCL	2-Wire serial Interface Clock	2
12	SDA	2-Wire serial Interface Data	2
13	GND	Transmitter Ground (Common with Receiver Ground)	1
14	Rx3+	Receiver Non-Inverted Data Output	
15	Rx3-	Receiver Inverted Data Output	
16	GND	Transmitter Ground (Common with Receiver Ground)	1
17	Rx1+	Receiver Non-Inverted Data Output	
18	Rx1-	Receiver Inverted Data Output	
19	GND	Transmitter Ground (Common with Receiver Ground)	1
20	GND	Transmitter Ground (Common with Receiver Ground)	1
21	Rx2-	Receiver Inverted Data Output	
22	Rx2+	Receiver Non-Inverted Data Output	
23	GND	Transmitter Ground (Common with Receiver Ground)	1
24	Rx4-	Receiver Inverted Data Output	1
25	Rx4+	Receiver Non-Inverted Data Output	
26	GND	Transmitter Ground (Common with Receiver Ground)	1
27	ModPrsL	Module Present	
28	IntL	Interrupt	2
29	VccTx	3.3V power supply transmitter	
30	Vcc1	3.3V power supply	
31	LPMODE	Low Power Mode	2
32	GND	Transmitter Ground (Common with Receiver Ground)	1
33	Tx3+	Transmitter Non-Inverted Data Input	
34	Tx3-	Transmitter Inverted Data Output	
35	GND	Transmitter Ground (Common with Receiver Ground)	1
36	Tx1+	Transmitter Non-Inverted Data Input	
37	Tx1-	Transmitter Inverted Data Output	
38	GND	Transmitter Ground (Common with Receiver Ground)	1

Notes:

1. The module signal grounds are isolated from the module case.
2. This is an open collector/drain output that on the host board requires a 4.7K Ω to 10K Ω pull-up resistor to VccHost.

Pin Assignment and Description

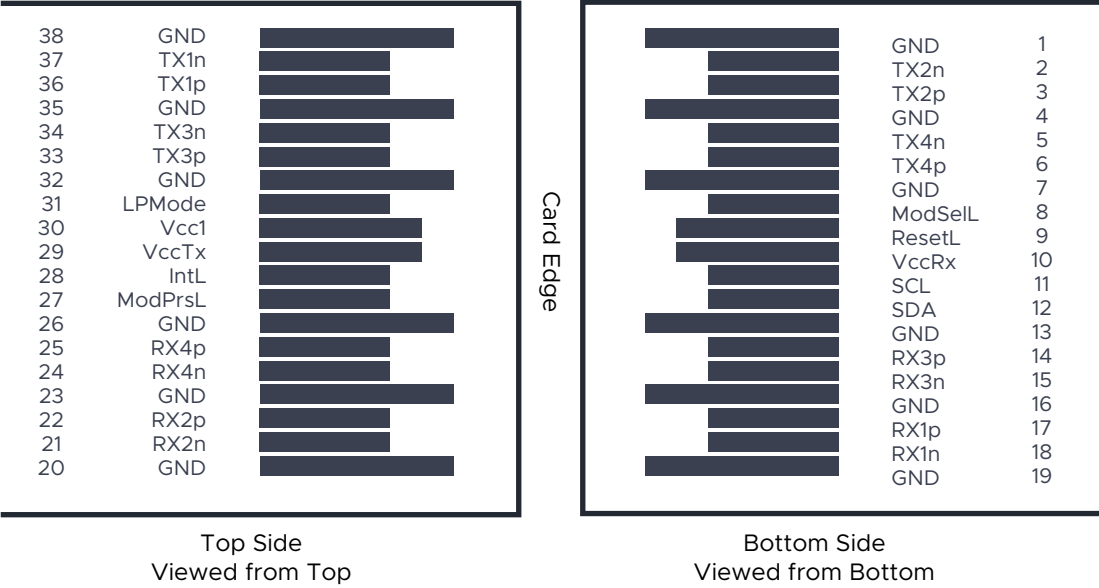

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Units	Notes
Storage Temperature	Ts	-40	85	°C	
Power Supply Voltage	Vcc	-0.5	3.6	V	
Relative Humidity (non-condensation)	RH	5	95	%	

Notes:
Exceeding any of these values may be harmful for the device

Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Units
Operating Case Temperature	Tc	0	-	70	°C
Supply Voltage	Vcc	3.13	3.3	3.47	V
Data Rate per Lane	-	-	10.3125	11.2	Gb/s
Distance on SMF	-	-	-	2	Km

Transceiver Electrical Characteristics

Parameter	Symbol	Min	Typical	Max	Units	Notes
Power Dissipation	-	-	-	3.5	W	-
Supply Current	I _{cc}	-	-	1100	mA	-
Transmitter						
Input Differential Impedance	Z _{in}	90	100	110	Ω	-
Differential Data Input Swing	V _{in} , P-P	180	-	900	mV	-
Receiver						
Output Differential Impedance	Z _o	90	100	110	Ω	-
Differential Data Output Swing	V _{out} , P-P	300	-	850	mV	-


Transceiver Optical Characteristics

Parameter	Symbol	Min	Typical	Max	Units	Notes
Transmitter						
Center wavelength	λ	1260	1310	1355	nm	-
Average Launch Power per Lane	Pout	-5.2	-	0.5	dBm	1
Extinction Ratio	ER	3.5	-	-	dB	2
Side Mode Suppression Ratio	SMRS	30	-	-	dB	-
Optical Return Loss Tolerance	ORLT	-	-	12	dB	-
Pout @TX - Disable Asserted per Lane	Poff	-	-	-30	dBm	-
Eye Mask Diagram		IEEE Std 802.3ba compatible				1
Receiver						
Center Wavelength	λ	1260	-	1355	nm	-
Receiver Sensitivity (OMA)	S	-	-	-12.6	dBm	-
Damage Threshold	Pmax	2.3	-	-	dBm	3
LOS De-Assert	LOSD	-	-	-13	dBm	-
LOS Assert	LOSA	-30	-	-	dBm	-
LOS Hysteresis	-	0.5	-	6	dB	-

Notes:

1. The optical power is launched into SMF
2. Measured with a PRBS 2³¹-1 test pattern @ 10.3125Gbps.
3. Measured with PRBS 2³¹-1 test pattern, 10.3125Gb/s, BER < 1⁻¹⁰-12.

Mechanical specifications

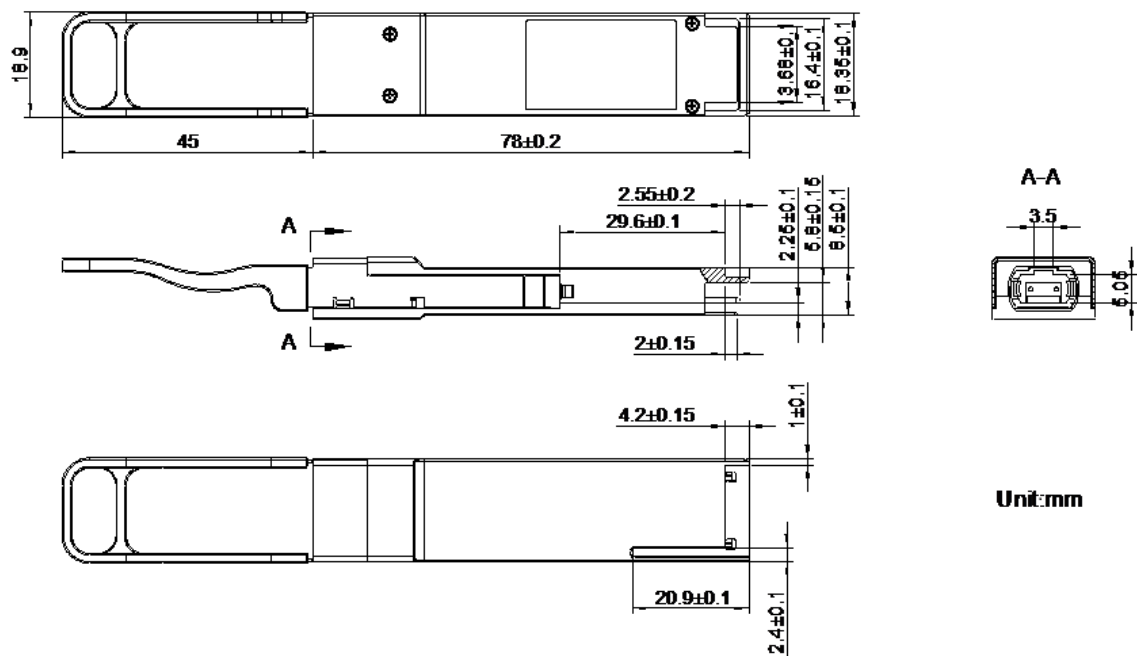

Revision history

Revision	Date	Author	Description
V1.0	31-05-2020	JGN	Initial Document

Note : Nexgen A/S reserves the right to change this document without notice.