

QSFP-40G-SR4-BX

40GBase QSFP+
Bidirectional
100m Reach

+45 (0)32 72 66 76

info@nexgen.eu

www.nexgen.eu



Features

- Hot-pluggable QSFP+
- Supports 40Gb/s aggregate bit rate
- DDM function compliant with SFF-8436
- Compliant with IEEE 802.3ba
- QSFP+ MSA compliant
- LC DuplexI connector
- 40GE link distances 100m OM3, 150m OM4
- Operating case temperature range 0 to 70°C
- Single 3.3V power supply
- RoHS-6 compliant



Applications

- 40 Gigabit Ethernet interconnects
- Datacom/Telecom switch & router connections
- Data aggregation and backplane applications
- Proprietary protocol and density applications

Part number

QSFP-40G-SR4-BX

Product description

40GBase MMF QSFP+ Bidi 850/900nm 150m 0°C to 70°C LC Duplex DDM


PIN Description

Pin		Function/Description	Notes
1	GND	Transmitter Ground (Common with Receiver Ground)	1
2	Tx2-	Transmitter Inverted Data Input	
3	Tx2+	Transmitter Non-Inverted Data output	
4	GND	Transmitter Ground (Common with Receiver Ground)	1
5	Tx4-	Transmitter Inverted Data Input	
6	Tx4+	Transmitter Non-Inverted Data output	
7	GND	Transmitter Ground (Common with Receiver Ground)	1
8	ModSelL	Module Select	2
9	ResetL	Module Reset	2
10	VccRx	3.3V Power Supply Receiver	
11	SCL	2-Wire serial Interface Clock	2
12	SDA	2-Wire serial Interface Data	2
13	GND	Transmitter Ground (Common with Receiver Ground)	1
14	Rx3+	Receiver Non-Inverted Data Output	
15	Rx3-	Receiver Inverted Data Output	
16	GND	Transmitter Ground (Common with Receiver Ground)	1
17	Rx1+	Receiver Non-Inverted Data Output	
18	Rx1-	Receiver Inverted Data Output	
19	GND	Transmitter Ground (Common with Receiver Ground)	1
20	GND	Transmitter Ground (Common with Receiver Ground)	1
21	Rx2-	Receiver Inverted Data Output	
22	Rx2+	Receiver Non-Inverted Data Output	
23	GND	Transmitter Ground (Common with Receiver Ground)	1
24	Rx4-	Receiver Inverted Data Output	1
25	Rx4+	Receiver Non-Inverted Data Output	
26	GND	Transmitter Ground (Common with Receiver Ground)	1
27	ModPrsL	Module Present	
28	IntL	Interrupt	2
29	VccTx	3.3V power supply transmitter	
30	Vcc1	3.3V power supply	
31	LPMode	Low Power Mode	2
32	GND	Transmitter Ground (Common with Receiver Ground)	1
33	Tx3+	Transmitter Non-Inverted Data Input	
34	Tx3-	Transmitter Inverted Data Output	
35	GND	Transmitter Ground (Common with Receiver Ground)	1
36	Tx1+	Transmitter Non-Inverted Data Input	
37	Tx1-	Transmitter Inverted Data Output	
38	GND	Transmitter Ground (Common with Receiver Ground)	1

Notes:

1. The module signal grounds are isolated from the module case.
2. This is an open collector/drain output that on the host board requires a 4.7K Ω to 10K Ω pull-up resistor to VccHost.

Pin Assignment and Description

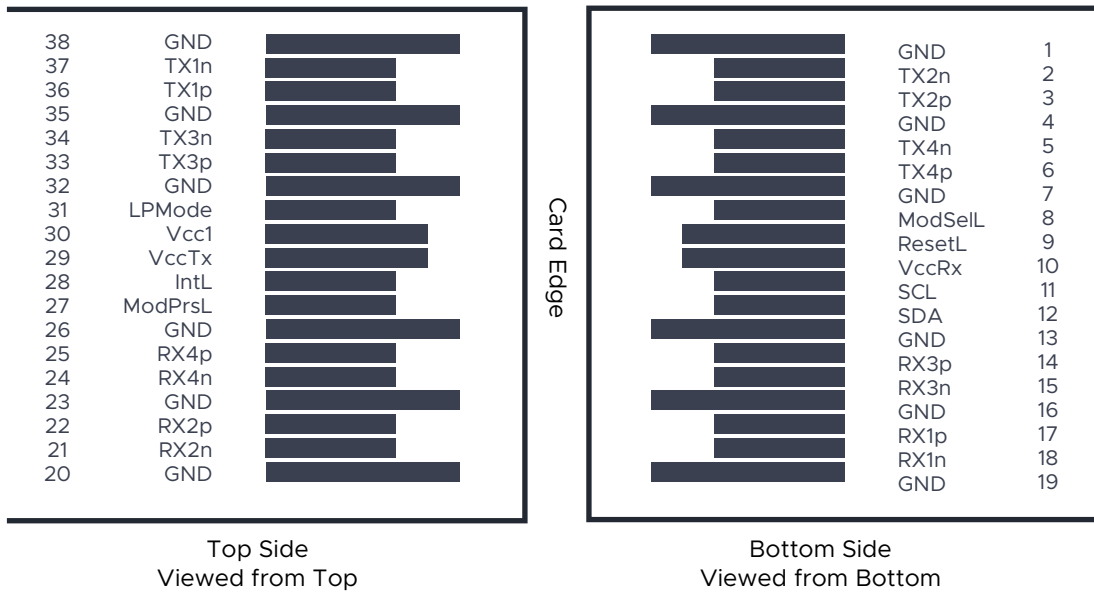

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Units	Notes
Storage Temperature	Ts	-40	85	°C	
Power Supply Voltage	Vcc	-0.5	4.0	V	
Relative Humidity (non-condensation)	RH	5	95	%	

Notes:

Exceeding any of these values may be harmful for the device

Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Units
Operating Case Temperature	Tc	0	-	70	°C
Supply Voltage	Vcc	3.13	3.3	3.47	V
Data Rate per Lane	-	-	10.3125	-	Gb/s
Distance on OM3 MMF	-	-	-	100	m
Distance on OM4 MMF	-	-	-	150	m

Transceiver Electrical Characteristics

Parameter	Symbol	Min	Typical	Max	Units	Notes
Power Dissipation	-	-	-	3.5	W	-
Supply Current	Icc	-	-	1000	mA	-
Transmitter						
Input Differential Impedance	Rin	80	100	120	Ω	-
Differential Data Input Swing	Vin, P-P	120	-	1200	mV	-
Receiver						
Single Ended Output Voltage Tolerance	-	0.3	-	4.0	V	-
Rx Output Diff Voltage	Vo	-	-	17.5	mV	-
Rx Output Rise and Fall Voltage	Tr-Tf	-	-	35	ps	1
Total Jitter	TJ	-	-	0.7	UI	-
Deterministic Jitter	DJ	-	-	0.42	UI	-

Notes:
1. 20% to 80%


Transceiver Optical Characteristics

Parameter	Symbol	Min	Typical	Max	Units	Notes
Transmitter						
Center wavelength 1	λ	832	850	868	nm	-
Center wavelength 2	λ	882	900	918	nm	-
RMS Spectral Width	Pm	-	0.5	0.65	nm	-
Average Optical Power per Channel	Pavg	-4	2.5	5.0	dBm	-
Extinction Ratio	ER	3.5	-	-	dB	-
Laser Off Power Per Channel	Poff	-	-	-30	dBm	-
Relative Intensity Noise	Rin	-	-	-128	dB/HZ	1
Optical Return Loss Tolerance	-	-	-	12	dB	-
Receiver						
Center Wavelength 1	λ	882	900	918	nm	-
Center Wavelength 1	λ	832	850	868	nm	-
Receiver Sensitivity per Channel	R	-	-11	-	dBm	-
Maximum Input Power	Pmax	0.5	-	-	dBm	-
Receiver Reflectance	Rrx	-	-	-12	dB	-
LOS De-Assert	LOSD	-	-	-14	dBm	-
LOS Assert	LOSA	-30	-	-	dBm	-
LOS Hysteresis	LOSH	0.5	-	-	dB	-

Notes:

1. 12 dB reflection

Mechanical specifications

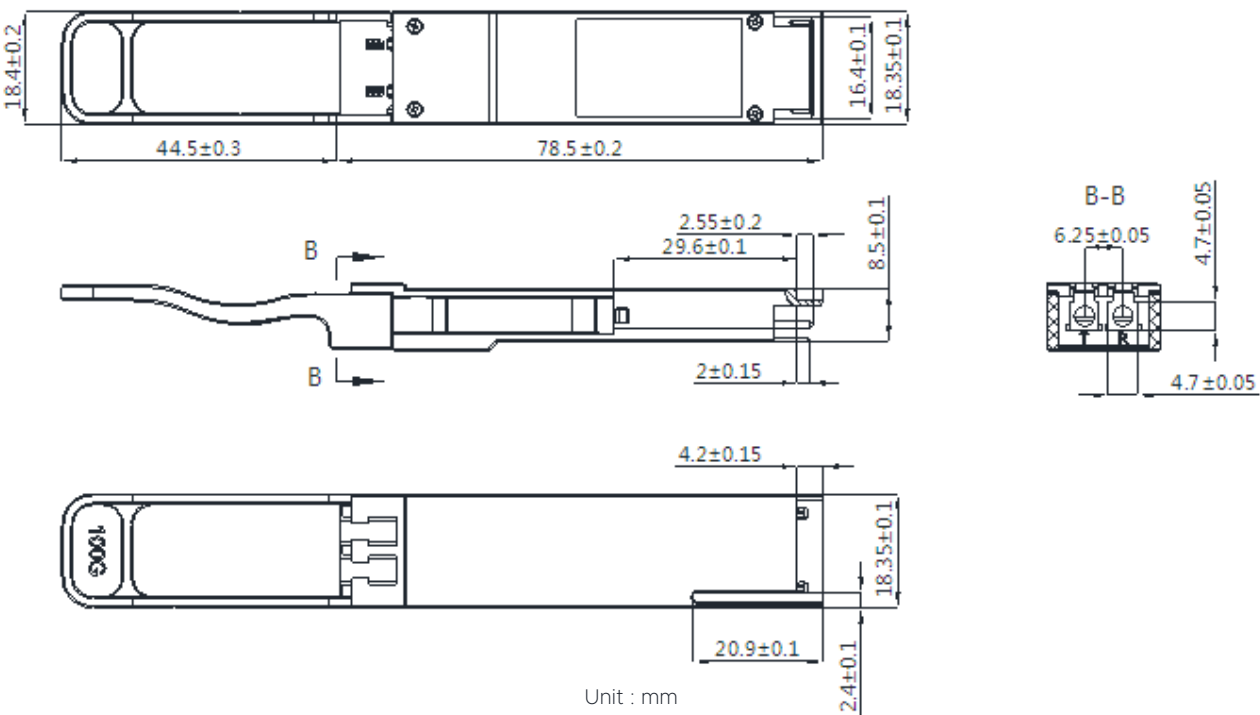

Revision history

Revision	Date	Author	Description
V1.0	31-05-2020	JGN	Initial Document

Note : Nexgen A/S reserves the right to change this document without notice.