

## SFP-16FC-SR

16G Fiber Channel SFP+  
850nm  
100m Reach

+45 (0)32 72 66 76



info@nexgen.eu



www.nexgen.eu



## Features

- Supports up to 14.025Gb/s
- Hot-pluggable SFP+ footprint
- 850nm VCSEL laser and PIN receiver
- Up to 100m on OM3-MMF transmission
- Compliant with SFP+ MSA and SFF-8472
- Duplex LC connector
- Single +3.3V power supply
- Real Time Digital Diagnostic Monitoring
- Operating case temperature: 0 to +70°C
- RoHS Compliant



## Applications

- 4.25 / 8.5 / 14.025G Fibre channel

Part number	Product description
SFP-16FC-SR	16GBase-SR Fiber Channel MMF SFP+ 850nm 100m 0°C to 70°C LC Duplex DDM
SFP-16FC-SR-I	16GBase-SR Fiber Channel MMF SFP+ 850nm 100m -40°C to 85°C LC Duplex DDM

# PIN Description

PIN	Symbol	Name - Description	Notes
1	VEET	Transmitter Ground (Common with Receiver Ground)	
2	TFAULT	Transmitter Fault. Not supported.	1
3	TDIS	Transmitter Disable. Laser output disabled on high or open.	2
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	1
5	MOD_DEF(1)	Module Definition 1. Clock line for Serial ID.	1
6	MOD_DEF(0)	Module Definition 0. Grounded within the module.	1
7	Rate Select	No connection required	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	3
9	VEER	Receiver Ground (Common with Transmitter Ground)	
10	VEER	Receiver Ground (Common with Transmitter Ground)	
11	VEER	Receiver Ground (Common with Transmitter Ground)	
12	RD-	Receiver Inverted DATA out. AC Coupled	4
13	RD+	Receiver Non-inverted DATA out. AC Coupled	4
14	VEER	Receiver Ground (Common with Transmitter Ground)	
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground (Common with Receiver Ground)	
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	5
19	TD-	Transmitter Inverted DATA in. AC Coupled.	5
20	VEET	Transmitter Ground (Common with Receiver Ground)	

Notes:

1. Open collector/drain output, which should be pulled up with a 4.7kΩ to 10kΩ resistor on the host board if intended for use. Pull up voltage should be between 2.0V to 3.6V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
2. Laser output disabled on Tx\_Disable >2.0V or open, enabled on Tx\_Disable <0.8V.
3. LOS is open collector output. Should be pulled up with 4.7kΩ to 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
4. RD-/+ : These are the differential receiver outputs. They are internally AC-coupled 100Ω differential lines which should be terminated with 100Ω (differential) at the user SERDES.
5. TD-/+ : These are the differential transmitter inputs. They are internally AC-coupled, differential lines with 100Ω differential termination inside the module.

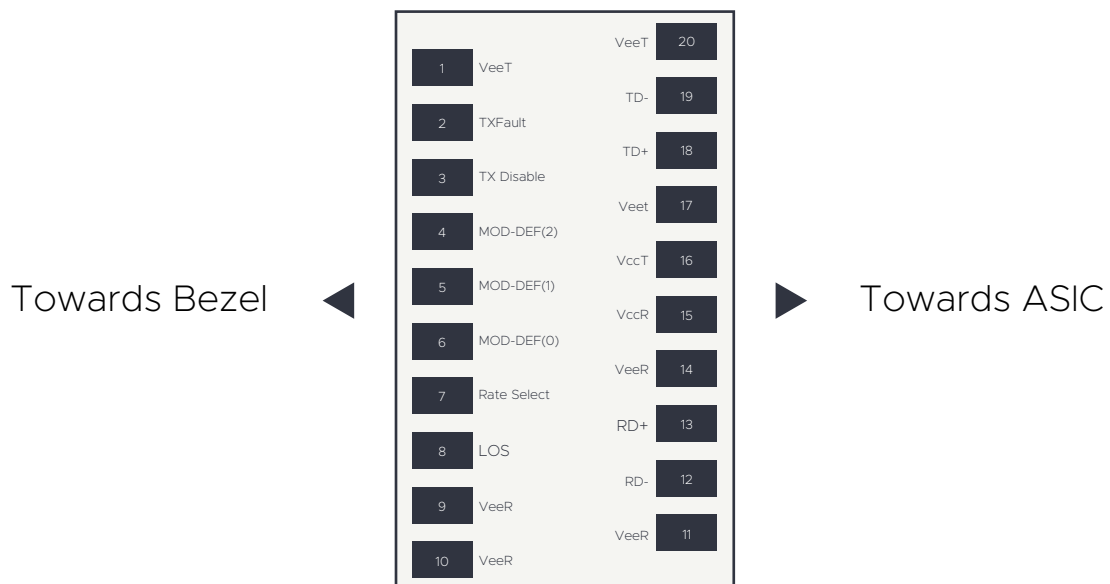


Figure 1. Diagram of host board connector block pin numbers and names

## Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Maximum Supply Voltage	V <sub>cc</sub>	-0.5	-	+4.0	V	
Storage Temperature	T <sub>s</sub>	-40	-	+85	°C	
Relative Humidity	RH	5	-	95	%	1

Notes:

1. Non-condensing.

## Recommend Operation Conditions

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Power Supply Voltage	V <sub>cc</sub>	3.13	3.3	3.47	V	
Power Supply Current	I <sub>cc</sub>	-	-	300	mA	
Power Dissipation	P <sub>o</sub>	-	-	1.05	W	
Case Operating Temperature (com.)	T <sub>op</sub>	0	-	+70	°C	
Case Operating Temperature (ind.)	T <sub>op</sub>	-40	-	+85	°C	

## Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Transmitter						
Input Differential Impedance	Z <sub>in</sub>	90	100	110	Ω	1
Differential Data Input Swing	V <sub>in</sub>	180	-	950	mV	-
Receiver						
Output Differential Impedance	Z <sub>out</sub>	90	100	120	Ω	2
Differential Data Output Swing	V <sub>out</sub>	500	700	900	mV	-

Notes:

1. PECL input, internally AC-coupled and terminated
2. Internally AC-coupled


# Optical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Transmitter						
Optical Center Wavelength	$\lambda_C$	840	850	860	nm	-
Average Output Power	$P_o$	-7.8	-	-0.5	dBm	1
Optical Extinction Ratio	ER	3.0	-	-	dB	-
RMS Spectral Width	$\Delta\lambda$	-	-	0.59	nm	-
Data Rate	-	-	14.025	-	Gb/s	-
Side Mode Suppression Ratio	SMSR	30	-	-	dB	-
Receiver						
Optical Center Wavelength	$\lambda_C$	840	-	860	nm	-
Receiver Sensitivity	$P_{min}$	-	-	-10.5	dBm	2
Receiver Overload	$P_{max}$	0	-	-	dBm	2
LOS De-Assert	LOSD	-	-	-12	dBm	-
LOS Assert	LOSA	-22	-	-	dBm	-
LOS Hysteresis	LOSH	0.5	-	4.0	dB	-

## Notes:

1. The optical power is launched into MMF
2. Measured with a PRBS 2<sup>31</sup>-1 test pattern @14025Mb/s, BER  $\leq 1 \times 10^{-12}$ .

## Mechanical Dimensions

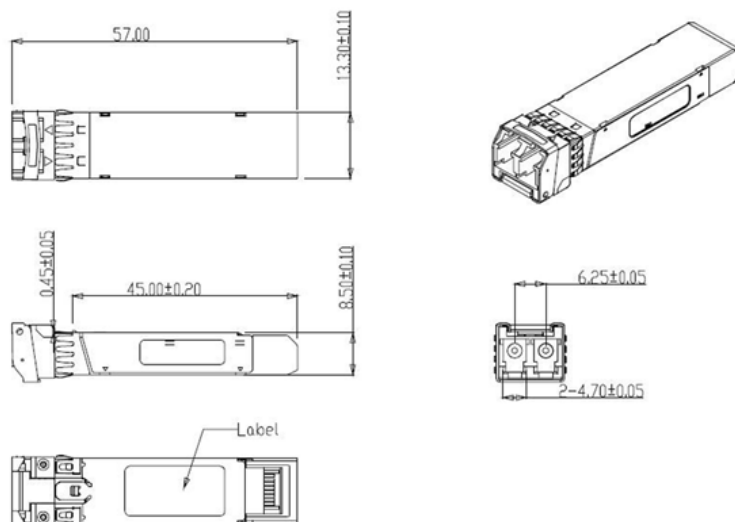

## Revision history

Revision	Date	Author	Description
V1.1	05-03-2020	JGN	Initial Document

Note : Nexgen A/S reserves the right to change this document without notice.